



SURTRON[®]

200

MONOPOLAR AND BIPOLAR ELECTROSURGICAL UNIT



AMBULATORY SURGERY
ENDOSCOPY
FIRST AID
GASTROENTEROLOGY
GENERAL SURGERY
GYNECOLOGY
NEUROSURGERY
ORTHOPEDICS
OTORHINOLARYNGOLOGY
PEDIATRIC SURGERY
PLASTIC SURGERY
PNEUMOLOGY
UROLOGY
VASCULAR SURGERY
VETERINARY



Many surgical procedure
by a double generator



SURTRON® 200

Reference code
Maximum output power CUT
Maximum output power ENHANCED
Maximum output power BLEND
Maximum output power FORCED COAG
Maximum output power SOFT COAG
Maximum output power BIPOLAR COAG
Working frequency
Patient circuit
Mains voltage
Mains frequency
Electrical input power
Size WxHxD mm
Weight

10100.401
200W - 250Ω
120W - 250Ω
120W - 200Ω
150W - 150Ω
90W - 100Ω
80W - 100Ω
600 kHz
F
115-230 Vac
50-60 Hz
350 VA
370x144x319
6 Kgs

Patient to plate contact control
Split return electrode use allowed
Minimally invasive surgical treatment allowed
Monopolar and Bipolar independent output
Auto Start/Stop in Bipolar Coag
Working condition storing
Power delivery by pedal and/or handle
Digital regulation and indication of the output power
Sound level control
Adjustable power increment



SURTRON

Programmable
by the user



SURTRON 200 is a high frequency electrosurgical equipment which is suitable to light and medium surgery.

SURTRON 200 allows to execute surgical minimally invasive procedure of resection, evaporation and coagulation.

SURTRON 200 through its performances allows pure CUT, cut-coagulation BLEND, incision with reduced production of eschar ENHANCED, superficial coagulation FORCED COAG, deep coagulation in absence of necrosis SOFT COAG and BIPOLAR coagulation.

The digital reading of the delivered power and the overseeing through microcontroller of the operational functions, assure the absolute reliability of the conditions of job.

SURTRON 200 allows a highly professional surgery thanks to the user-friendly and safety solutions normally used.

The connection of neutral electrode is constantly monitored. Safety control of patient/plate contact using split neutral electrode. The possibility to control by the handle the output functions as well as the delivery of output power, allows to implement the surgical operation without turning away the surgeon attention from the surgical field.

Minimally invasive
surgery allowed





SAFETY

EN60601-1
EN60601-1-2
EN60601-2-2
Electrical Class: I CF
MDD 93/42/EC Class: II b

CONTROLS

Patient/Plate circuit monitoring
Output power monitoring
Self check control

Size - mm

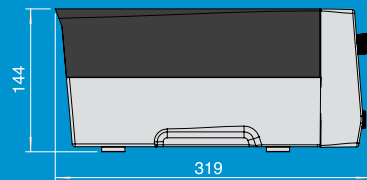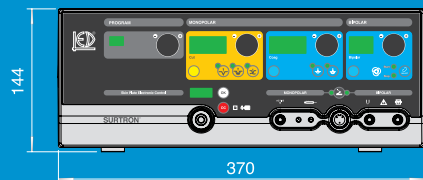

Standard Composition:

- Reusable handle with switches
- Assorted electrodes (10 pcs)
- Blade electrode 7 cm (3 pcs)
- Needle electrode 7 cm (3 pcs)
- Ball electrode 6 cm (3 pcs)
- Cable for neutral electrode
- Steel neutral electrode
- Disposable split neutral electrode (2 pcs)
- Waterproof foot switch
- Power supply cable 5mt

F4243
00500.00
152-110
152-120
152-150
00404.08
5365
F7920
00302.00
00100.01

