



SURTRON[®] EVAC

ELECTROSURGERY SMOKE EVACUATOR



- AUTOMATIC AND / OR MANUAL FUNCTIONING
- REGULATION OF THE ASPIRATION FLUX
- AUTOMATIC FUNCTION FOR LAPAROSCOPY
- CONTROL AND INDICATION OF USURY STATUS OF THE FILTER
- FAST SUBSTITUTION OF THE FILTERS
- DIFFERENT TYPE OF FILTERS
- ACTIVATED CARBONS FILTERS FOR THE ELIMINATION OF THE SMELLS



LED SpA

PROGETTAZIONI E PRODUZIONI ELETTRONICHE

via Selciatella, 40 - 04011 Aprilia (LT) - Italy
www.led.it - info@led.it - www.surtron.com



SURTRON EVAC is an aspiration and filtering system for the smokes produced during the surgical procedures.

The smokes, generated during the surgical procedures, have a bad, strong and long smell. These smokes consist of water vapour, organic gas, visible or invisible solid particles and viral parts. So a good aspiration and filtration eliminates bad smells, reduce the bacteriologist and/or viral risks, and solves, the particularly annoying problem of the optimal vision of the zone of the intervention, during the laparoscopic procedures.

In **SURTRON EVAC** the activation of the aspiration can be:
AUTOMATIC, through electronic

system of survey of the activation of the high frequency electrosurgical unit; **MANUAL**, acting directly on the unit through a foot switch (optional)
The flux of the aspiration can be regulated to be suitable with the singular necessities. For laparoscopic procedures there is a specific function, quickly selectable.

SURTRON EVAC has an electronic control of the aspiration with the indication of the usury status of the filters.



There are two different kind of filter, quickly substituable and constituted by a filtering ULPA type with a active carbons part dedicated to the elimination of the bad smells of the electrosurgical smokes and connector of 7/8" (22mm).
The filters have an electronic system for the control of the status of use.

FILTER BLUE

The **BLUE** filter is the standard filter and it is included with the unit for a first time of use.

FILTER RED

The **RED** filter is an optional spare part, created for a long time of use.

SURTRON® EVAC



Reference codes
Input voltage
Mains frequency
Electrical input power
Max vacuum flow rate
Max static suction
Filter type
Filter efficiency
Particles diameter
Size WxHxD mm
Weight

10200.10 (230 Vac) - 10200.10/115V (115 Vac)
230 Vac or 115 Vac
50 Hz
800 VA
2700 LPM (95 CFM)
250 mbar (83 in H₂O)
ULPA with active carbon
99,999X%
0,3 micron
370x144x319
4 Kg


Standard Composition

- Power cable
- First ULPA Filter (5h) - BLU
- Apiration kit: **A** Filter **B** Pipe dia. 22mm lenght 2,4 mt (100")
- 4 Handle apiration kit: **C** Adapter 10mm/22mm **D** Pipe dia.10 Lenght 1,8 mt (72") **E** Clip to fix the pipe on the handle
- F** Adapter for the handle

Replacement parts

- ULPA Filter (20h) - RED
- Aspiration kit (6 pcs)
- Handle aspiration kit (12 pcs)

00900.FU01
00900.02/06
00900.01/12

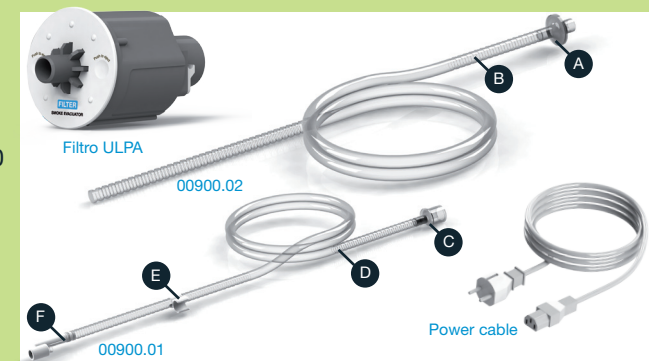

SURTRON and LED logo are registered trademarks of LED SpA